

# Product Selection Matrix



Outputs shown in red are average outputs in W/m, based on a 3m long unit, calculated in accordance with EN442, at a water temperature of 75/65°C and a room temperature of 20°C ( $\Delta T=50$ ).

## Trench Heating | Natural

Outputs for natural trench heating products are based on the standard grille finish SNA. Please note choice of grille will affect output.

Mini Canal	depth ▼	width ►				
		140mm	180mm	260mm	340mm	420mm
	90mm	165	195	260	335	480
	110mm	190	225	305	395	555
	140mm	215		375	510	685
	190mm			425	575	790

Canal Compact & Canal Plus	depth ▼	width ►			
		360mm	350mm	390mm	510mm
	360mm	1020			
	680mm	Additional sizes available	1056	1621	2372


## Trench Heating | Dynamic fan assisted

Mini Dynamic Canal	depth ▼	width ►		
		260mm	340mm	420mm
	140mm	1235	1605	2040

Micro Canal	depth ▼	width ►
		180mm
	60mm	955




### Freestanding Perimeter Heating | Natural

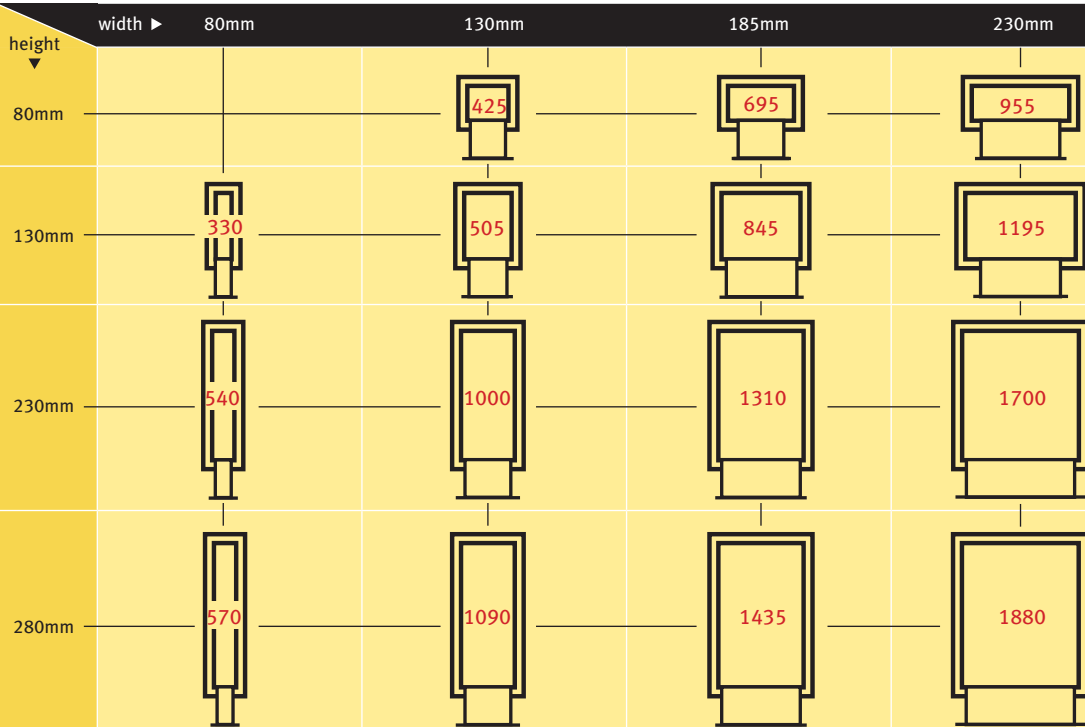


Mini Freestanding fixed feet: Add an additional 65mm for foot height | Mini Freestanding adjustable feet: Add an additional 135 - 340mm for foot height

### Freestanding Perimeter Heating | Dynamic fan assisted

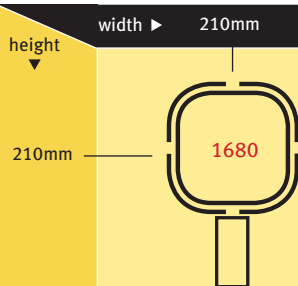

Add an additional 12mm for foot height

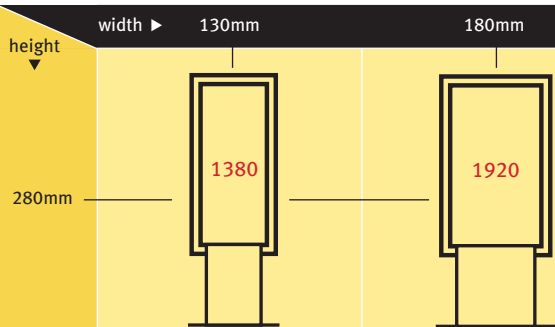

Add an additional 125mm for foot height

